

# OMIT series

## 10A Miniature Power PC Board Relay

**Appliances, HVAC, Office Machines.**

UL File No. E58304

CSA File No. LR48471

VDE File No. 6678

SEMKO File No. 8713114

SEV File No. 97550375

### Features

- Meet UL 508, VDE0435, SEMKO and SEV requirements.
- 1 Form A contact arrangements.
- UL TV-5 rating available.
- Immersion cleanable, sealed version available.
- Meet 5,000V dielectric voltage between coil and contacts.
- Meet 10,000V surge voltage between coil and contacts (1.2 / 50µs).

### Contact Data @ 20°C

**Arrangements:** 1 Form A.

**Material:** AgSnO

**Max. Switching Rate:** 300 ops./min. (no load),  
30 ops./min. (rated load).

**Expected Mechanical Life:** 10 million operations (no load).

**Expected Electrical Life:** 100,000 operations (rated load).

**Minimum Load:** 100mA @ 5VDC.

**Initial Contact Resistance:** 100 milliohms @ 1A, 6VDC.

### Coil Data @ 20°C

OMIT-L Sensitive				
Rated Coil Voltage (VDC)	Nominal Current (mA)	Coil Resistance (ohms) ± 10%	Must Operate Voltage (VDC)	Must Release Voltage (VDC)
3	176.5	17	2.25	0.15
5	106.4	47	3.75	0.25
6	88.0	68	4.50	0.30
9	58.0	155	6.75	0.45
12	44.4	270	9.00	0.90
24	21.8	1,100	18.00	1.20
48	10.9	4,400	36.00	2.40
OMIT-D Standard				
Rated Coil Voltage (VDC)	Nominal Current (mA)	Coil Resistance (ohms) ± 10%	Must Operate Voltage (VDC)	Must Release Voltage (VDC)
3	240.0	12.5	2.10	0.15
5	138.9	36	3.50	0.25
6	120.0	50	4.20	0.30
9	78.3	115	6.30	0.45
12	60.0	200	8.40	0.90
24	29.3	820	16.80	1.20
48	14.5	3,300	33.60	2.40

### Contact Ratings

**Ratings:** 10A @ 240VAC resistive,  
TV-5 @ 120VAC tungsten 25,000ops.

**Max. Switched Voltage:** AC: 240V.  
DC: 30V.

**Max. Switched Current:** 10A.

**Max. Switched Power:** 2,400VA, 300W.

### Operate Data

**Must Operate Voltage:**

OMIT-D: 70% of nominal voltage or less.

OMIT-L: 75% of nominal voltage or less.

**Must Release Voltage:** 5% of nominal voltage or more.

**Operate Time:** OMIT-D: 15 ms max.

OMIT-L: 20 ms max.

**Release Time:** 8 ms max.

### Initial Dielectric Strength

**Between Open Contacts:** 1,000VAC 50/60 Hz. (1 minute).

**Between Coil and Contacts:** 5,000VAC 50/60 Hz. (1 minute).

**Surge Voltage Between Coil and Contacts:** 10,000V (1.2 / 50µs).

### Environmental Data

**Temperature Range:**

**Operating:** OMT-D:

-30°C to +55°C

OMT-L:

-30°C to +70 °C

**Vibration, Mechanical:** 10 to 55 Hz., 1.5mm double amplitude

**Operational:** 10 to 55 Hz., 1.5mm double amplitude.

**Shock, Mechanical:** 1,000m/s<sup>2</sup> (100G approximately).

**Operational:** 100m/s<sup>2</sup> (10G approximately).

**Operating Humidity:** 20 to 85% RH. (Non-condensing).

### Initial Insulation Resistance

**Between Mutually Insulated Elements:** 1,000M ohms min. @ 500VDCM.

### Coil Data

**Voltage:** 3 to 48VDC.

**Nominal Power:** 720 mW (OMI-D), 540mW (OMI-L).

**Coil Temperature Rise:** 45°C max., at rated coil voltage (OMI-D).

35°C max., at rated coil voltage (OMI-L).

**Max. Coil Power:** 130% of nominal.

**Duty Cycle:** Continuous.

### Mechanical Data

**Termination:** Printed circuit terminals.

**Enclosure (94V-0 Flammability Ratings):**

OMIT-SS: Vented (Flux-tight) plastic cover.

OMIT-SH: Sealed plastic case.


**Weight:** 0.46 oz (13g) approximately.

**Ordering Information**

Typical Part Number ▶	<b>OMIT</b>	<b>-SS</b>	<b>-1</b>	<b>12</b>	<b>L</b>	<b>M</b>
<p><b>1. Basic Series:</b> OMIT = Miniature Sealed PC Board Relay</p> <p><b>2. Enclosure:</b> SS = Vent (Flux-tight)* plastic cover. SH = Sealed, plastic case.</p> <p><b>3. Termination:</b> 1 = 1 pole</p> <p><b>4. Coil Voltage:</b> 03 = 3VDC    06 = 6VDC    12 = 12VDC    48 = 48VDC 05 = 5VDC    09 = 9VDC    24 = 24VDC</p> <p><b>5. Coil Input:</b> D = Standard (720mW)    L = Sensitive (540mW)</p> <p><b>6. Contact Arrangement:</b> Blank = 1 Form C, SPDT    M = 1 Form A, SPST-NO</p>						

\* Not suitable for immersion cleaning processes.


**Outline Dimensions**

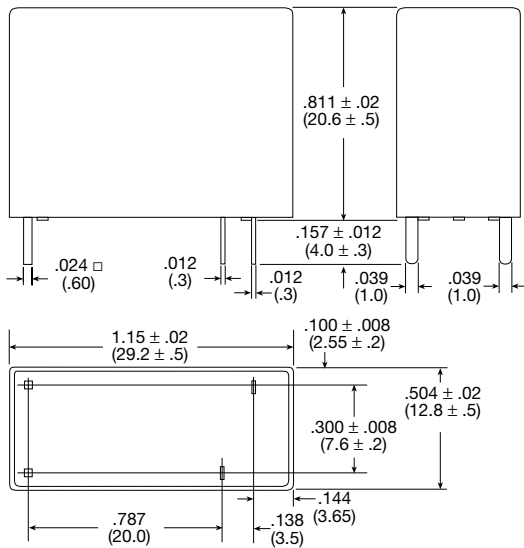

**Wiring Diagram (Bottom View)**




**PC Board Layout (Bottom View)**

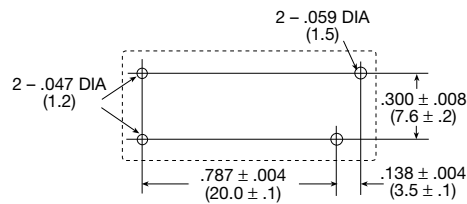


**Reference Data**

**Coil Temperature Rise**

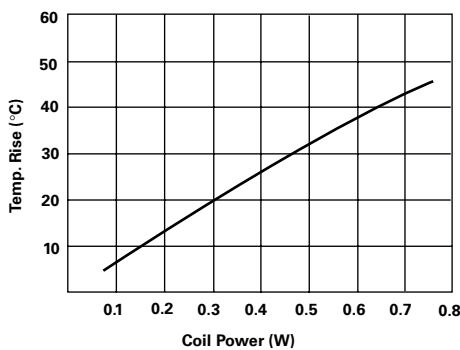

**Operate Time**

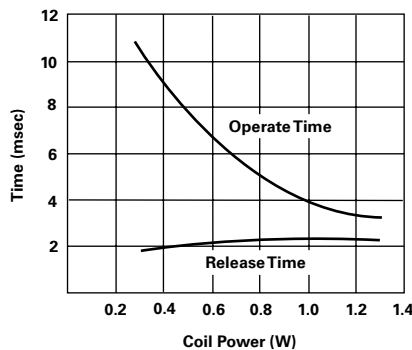

**Life Expectancy**

